


Operating Instructions

Interface Board **Commercial Use**

Model No. **ET-MDNHM10**
ET-MDNDV10



* The illustration above is an example. In this manual, illustrations of ET-MDNHM10 are used as an example unless otherwise specified.

ENGLISH

FRANÇAIS

Read before use

The “Operating Instructions” explains about the interface boards to be installed to a Panasonic Connect Co., Ltd. display device (projector or flat panel display). For Model No. and model names, refer to the product list (➔ page 4).

Thank you for purchasing this Panasonic product.

- Before using this product, please read these “Operating Instructions” and the “Operating Instructions” of the display device carefully and save the manuals for future use.
- Before using this product, be sure to read “Read this first!” (➔ page 3).

4K
PROFESSIONAL

Contents

Read this first!	3
Precautions for use	4
Products list	4
Supported display device	4
About the handling of the product	4
Disposal	5
Accessories	5
Part names and functions	5
Installing the Interface Board	6
Before installing or removing the Interface Board	6
How to install the Interface Board	7
How to remove the Interface Board	8
Specifications	9

■ Trademarks

- The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

Read this first!

WARNING:

Do not spill water on this product or allow this product to get wet.

Doing so may cause fire, electric shock, or malfunction due to short circuit or overheating.

- Do not place a container with liquid close to this product.
- Consult your dealer when liquid such as water is spilled on this product.

Do not place the supplied screws in a location that a child can reach.

Accidentally swallowing them can cause a physical harm.

- Seek a medical advice immediately if a child might have swallowed a screw.

Do not disassemble or modify.

Doing so may cause electric shock or fire. It may also cause a malfunction.

Ask the qualified technician or your dealer to install or remove this product to/from the flat panel display.

Failure to do so may cause electric shock. It may also cause a malfunction.

Turn off the power and disconnect the power plug from the outlet when installing or removing this product to/from the flat panel display.

Failure to do so may cause electric shock.

CAUTION:

Do not place this product in a location with excessive humidity or dust, or in a location exposed to oil smoke or steam.

Doing so may cause fire or electric shock.

Do not place this product in extremely hot location.

Doing so may deteriorate the part, or may cause fire.

- Do not install or store in a location with direct sunlight or close to the heating device, etc.

Turn off the power and disconnect the power plug from the outlet when installing or removing this product to/from the projector.

Failure to do so may cause electric shock.

Precautions for use

Products list

The product names and their Model Nos. described in this document are as follows.

Product name	Product Model No.	Remark
Interface Board for HDMI 2 input	ET-MDNHM10	An Interface Board equipped with 2 HDMI inputs.
Interface Board for DVI-D 2 input	ET-MDNDV10	An Interface Board equipped with 2 DVI-D inputs.

Supported display device

The display device (projector or flat panel display) supported by the Interface Board described in this document is as follows.

(As of March 2019)

Projector	PT-RQ13K, PT-RQ32K, PT-RQ22K
Flat panel display	(Support to be determined)

Note

- The model not described in the table may also be supported. Refer to the Operating Instructions of your display device.

About the handling of the product

■ Do not touch the connector section of the Interface Board directly with your hands.

The component may be damaged by the static electricity. Handle this product after removing the static in your body by touching the surrounding metal, etc.

■ Ask a qualified technician to install or remove to/from the flat panel display.

There is a danger of electric shock or a malfunction may occur due to static electricity. Consult your dealer.

Disposal

To dispose of the product, ask your local authorities or dealer for correct methods of disposal.

Accessories

Make sure that the following accessories are provided with your product. Numbers enclosed in < > show the number of accessories.

Screw <4>
(XSB3+8FN)



Attention


- Appropriately discard the packaging material after unpacking the product.
- For missing accessories, consult your dealer.
- Store small parts in an appropriate manner, and keep them away from small children.

Note

- The supplied screws are spare. Use them when a screw to fix the slot cover of the display device is lost.
- The model numbers of accessories are subject to change without prior notice.

Part names and functions

■ Interface Board for HDMI 2 input (Model No.: ET-MDNHM10)

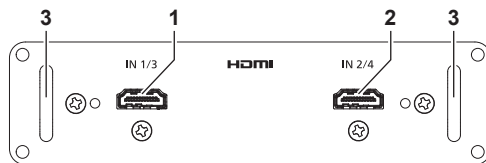


1 <HDMI IN 1> terminal (when installed in <SLOT 1> of the display device), <HDMI IN 3> terminal (when installed in <SLOT 2> of the display device)
This is a terminal to input the HDMI signal.

2 <HDMI IN 2> terminal (when installed in <SLOT 1> of the display device), <HDMI IN 4> terminal (when installed in <SLOT 2> of the display device)
This is a terminal to input the HDMI signal.

3 Handle

■ Interface Board for DVI-D 2 input (Model No.: ET-MDNDV10)

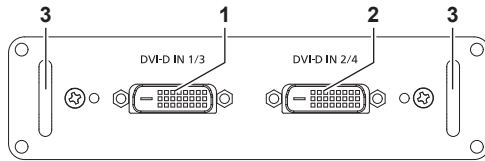

- 1 <DVI-D IN 1> terminal (when installed in <SLOT 1> of the display device), <DVI-D IN 3> terminal (when installed in <SLOT 2> of the display device)
This is a terminal to input the DVI-D signal.

- 2 <DVI-D IN 2> terminal (when installed in <SLOT 1> of the display device), <DVI-D IN 4> terminal (when installed in <SLOT 2> of the display device)
This is a terminal to input the DVI-D signal.

- 3 Handle

Installing the Interface Board

It is recommended to ask a qualified technician to install or remove the Interface Board to a projector. A malfunction may occur due to static electricity. Consult your dealer.

Ask a qualified technician to install or remove the Interface Board to/from a flat panel display. There is a danger of electric shock or a malfunction may occur due to static electricity. Consult your dealer.




Before installing or removing the Interface Board

- Always turn off the power of the display device (projector or flat panel display) before installing or removing the Interface Board.
 - Make sure to follow the procedure described in the Operating Instructions of your display device when turning off the power.
- Do not touch the connector section of the Interface Board directly with your hands.
 - The component may be damaged by the static electricity.
- Remove the static charge from your body by touching the surrounding metal, etc., in advance to prevent the static electricity damage.
- Take care not to get injured when installing or removing the Interface Board.
 - Hands may be injured by the opening of the blank slot of the display device or the edge of the bracket of the Interface Board.
- When installing the Interface Board to the slot, insert it into the connector straight and slowly.
 - It may not operate or cause malfunction if it is not correctly installed.

Installing the Interface Board

- The figure indicating the installation and removal of the Interface Board is using the combination of the Interface Board for HDMI 2 input (Model No.: ET-MDNHM10) and the optional projector (Model No.: PT-RQ13K) as an example. Illustration of this document may vary from the actual product.
- The details of the installation or removal may be different depending on the display device, so confirm the Operating Instructions of your display device too.

How to install the Interface Board



1) Remove the slot cover. (Fig. 1)

- Remove the four screws fixing the slot cover of the display by rotating counterclockwise with a Phillips screwdriver. The removed screws are used to fix the Interface Board.
- When removing the fourth screw, hold the slot cover with your hand so it will not fall.
- To replace from other Interface Board, remove the Interface Board following the procedure in “How to remove the Interface Board” (➔ page 8).

2) Install the Interface Board to the display device. (Fig. 2)

- Insert the guide groove of the Interface Board aligned to the salient of the slot. Insert the bracket firmly all the way in.

3) Fix the Interface Board. (Fig. 3)

- Tighten and fix with the four screws removed in Step 1).

Attention

- The removed slot cover is required when the unnecessary Interface Board is removed. Store it so it can be attached in the future.

How to remove the Interface Board




Fig. 1

1) Remove the Interface Board. (Fig. 1)

- Remove the four screws fixing the Interface Board by rotating counterclockwise with a Phillips screwdriver. The removed screws are used to fix the slot cover.
- Hold the handle of the Interface Board and remove it slowly.

2) Attach the slot cover.

- Attach the stored slot cover to the blank slot, and tighten and fix with the four screws removed in Step 1).
- To replace with other Interface Board, attach the Interface Board following the procedure in “How to install the Interface Board” (➔ page 7).

Attention

- Always attach the slot cover on the blank slot.
- Store the removed Interface Board inside an antistatic bag.

Specifications

The specifications of the Interface Board are as follows.

■ Interface Board for HDMI 2 input (Model No.: ET-MDNHM10)

Compatible slot		SLOT NX specification
Connecting terminal		2 sets, HDMI 19p, HDCP 2.3 compatible, Deep Color compatible
Compatible signal	Resolution	Moving image signal: 480i*1/576i*1 to 4 096 x 2 160 Still image signal: 640 x 400 to 3 840 x 2 400 (non-interlace)
	Dot clock frequency	25 MHz to 594 MHz
Dimensions	Width	151 mm (5-15/16")
	Height	38.5 mm (1-17/32")
	Depth	142 mm (5-19/32")
Weight		340 g (12.0 ozs.)

*1 Pixel-Repetition signal (dot clock frequency 27.0 MHz) only

■ Interface Board for DVI-D 2 input (Model No.: ET-MDNDV10)

Compatible slot		SLOT NX specification
Connecting terminal		2 sets, DVI-D 24p, DVI 1.0 compliant (only single link supported), HDCP compatible
Compatible signal	Resolution	Moving image signal: 480i*1/576i*1 to 2 048 x 1 080 Still image signal: 640 x 400 to 1 920 x 1 200 (non-interlace)
	Dot clock frequency	25 MHz to 162 MHz
Dimensions	Width	151 mm (5-15/16")
	Height	38.5 mm (1-17/32")
	Depth	142 mm (5-19/32")
Weight		350 g (12.3 ozs.)

*1 Pixel-Repetition signal (dot clock frequency 27.0 MHz) only

Note

- "SLOT NX" is a name of the slot unique to Panasonic Connect Co., Ltd. supporting the signal input for the 4K image.
- The video signal that can actually display will vary depending on the display device (projector or flat panel display) that the Interface Board is installed. For details, refer to the Operating Instructions of your display device.

English

Manufactured by:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Importer:

Panasonic Connect Europe GmbH

Authorized Representative in EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Germany

Importer for UK;

Panasonic Connect UK,
a branch of Panasonic Connect
Europe GmbH,
Maxis 2, Western Road, Bracknell,
Berkshire, RG12 1RT



Italiano

Fabbricato da:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Giappone

Importatore:

Panasonic Connect Europe GmbH

Rappresentante autorizzato nell'UE:

Panasonic Testing Centre
Winsbergring 15, 22525 Amburgo, Germania

Français

Fabriqué par:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japon

Importateur :

Panasonic Connect Europe GmbH

Représentant autorisé dans l'UE :

Panasonic Testing Centre
Winsbergring 15, 22525 Hambourg, Allemagne

Български

Производител:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Япония

Вносител:

Panasonic Connect Europe GmbH

Упълномощен представител в ЕС:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Германия

Español

Fabricado por:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japón

Importador:

Panasonic Connect Europe GmbH

Representante Autorizado para la UE:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburgo, Alemania

Čeština

Vyrobil:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonsko

Dovozce:

Panasonic Connect Europe GmbH

Právněný zástupce v EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburk, Německo

Deutsch

Hergestellt von:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Importeur:

Panasonic Connect Europe GmbH

Vertretungsberechtigter in der EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Deutschland

Dansk

Fremstillet af:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Importør:

Panasonic Connect Europe GmbH

Autoriseret repræsentant i EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Tyskland

Eesti

Tootja:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Jaapan

Maaletooja:

Panasonic Connect Europe GmbH

Volitatud esindaja ELis:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Saksamaa

Lietuvių

Gamintojas:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonija

Importuotojas:

Panasonic Connect Europe GmbH

Įgaliojasis atstovas ES:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburgas, Vokietija

Ελληνικά

Κατασκευάστηκε από:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Ιαπωνία

Εισαγωγέας:

Panasonic Connect Europe GmbH

Εξουσιοδοτημένος αντιπρόσωπος στην ΕΕ:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Γερμανία

Magyar

Gyártotta:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japán

Importőr:

Panasonic Connect Europe GmbH

Hivatalos képviselő az EU-ban:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Németország

Hrvatski

Proizvodi:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Uvoznik:

Panasonic Connect Europe GmbH

Onlaštveni zastupnik u EU-u:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Njemačka

Nederlands

Geproduceerd door:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Importeur:

Panasonic Connect Europe GmbH

Bevoegde vertegenwoordiger in de EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Duitsland

Latviešu

Ražotājs:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japāna

Importētājs:

Panasonic Connect Europe GmbH

Oficiālais pārstāvis ES:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Vācija

Norsk

Produsert av:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Importør:

Panasonic Connect Europe GmbH

Autorisert representant i EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Tyskland

Polski

Wyprodukowano przez:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonia

Importer:

Panasonic Connect Europe GmbH

Upoważniony przedstawiciel w UE:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Niemcy

Slovenščina

Proizvajala:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonska

Uvoznik:

Panasonic Connect Europe GmbH

Pooblaščen zastopnik v EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Nemčija

Português

Fabricado por:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japão

Importador:

Panasonic Connect Europe GmbH

Representante Autorizado na UE:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburgo, Alemanha

Türkçe

Tarafından Üretilmiştir:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonya

İthalatçı:

Panasonic Connect Europe GmbH

AB Yetkili Temsilcisi:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Almanya

Română

Fabricat de:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonia

Importator:

Panasonic Connect Europe GmbH

Reprezentant autorizat în UE:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Germania

Suomi

Valmistaja:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japani

Maahantuoja:

Panasonic Connect Europe GmbH

Valtuutettu edustaja EU:ssa:

Panasonic Testing Centre
Winsbergring 15, 22525 Hampuri, Saksa

Slovenčina

Výrobca:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japonsko

Dovozca:

Panasonic Connect Europe GmbH

Autorizovaný zástupca v EÚ:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Nemecko

Svenska

Tillverkad av:

Panasonic Connect Co., Ltd.
4-1-62 Minoshima, Hakata-ku, Fukuoka 812-8531,
Japan

Importör:

Panasonic Connect Europe GmbH

Auktoriserad representant i EU:

Panasonic Testing Centre
Winsbergring 15, 22525 Hamburg, Tyskland

MEMO



Product Information (for Turkey only)



AEEE Yönetmeliğine Uygundur.
Eski Ekipman ve Bataryaların İşlenmesi.
Sadece geri dönüşüm sistemleri olan Avrupa Birliği ve
ülkeleri için geçerlidir.

Ürünler, ambalaj ve/veya ekli belgeler üzerindeki bu semboller kullanılmış elektrik ve elektronik ürünlerin genel ev atığı ile karıştırılmaması gerektiğini ifade eder. Eski ürünlerin toplanması ve geri kazanılması için bu atıkları lütfen yasayla belirlenmiş olan uygun toplama merkezlerine teslim ediniz.

Bu atıkların doğru işlenmesiyle, değerli kaynakların korunmasına ve insan sağlığı ve çevreye olası negatif etkilerinin engellenmesine yardımcı olabilirsiniz.

Atıkların toplanması ve geri dönüşümü için detaylı bilgi için lütfen bağlı olduğunuz yerel yönetimlerle iletişime geçiniz. Atıkların atılmasıyla ilgili yanlış uygulamalar yasayla belirlenmiş olan cezalara sebebiyet verebilir.

Panasonic Connect Co., Ltd.

Web Site : <https://panasonic.net/cns/projector/>

© Panasonic Connect Co., Ltd. 2022

Panasonic Connect North America

Two Riverfront Plaza, Newark, NJ 07102

TEL: (877) 803 - 8492

Panasonic Canada Inc.

5770 Ambler Drive, Mississauga, Ontario L4W 2T3

TEL: (905) 624 - 5010